

DILATOFLEX®


FLEXIL® rubber flexible hose for manual or motorized pinch-valves

Applications


Pipe systems conveying waters or corrosive products or products with abrasive stuffs.

Maximum working pressure: 10 bars

Maximum working temperature 90° C depending on the medium (please contact us)

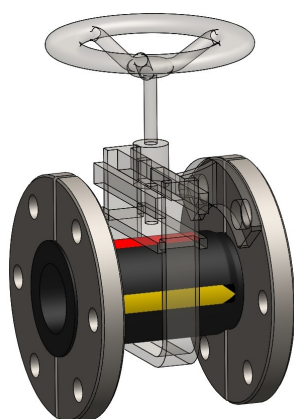

Nominal Diameter	Nominal Length	outer diameter	Width heel	Outer diameter Body	outer diameter Convolution	Weight	
	Ln mm	ø1 mm	e mm	ø2 mm	ø3 mm	Kg	
40	200	110	15	67	85	0,90	
50	200	125	15	79	95	1,00	
60	200	135	17	89	107	1,20	
80	300	160	17	106	122	2,20	We donot supply with the steel counterflanges in 2 parts for these nominal diameters
100	300	165	20	137	147	3,10	
125	450	190	20	162	172	5,90	
150	450	217	20	189	199	6,90	
200	800	270	14	243	277	43,10	Equipped with steel counterflanges in one part Drilling according to PN10 standard
250	1000	325	14	293	327	62,90	
300	1200	374	14	343	377	81,27	

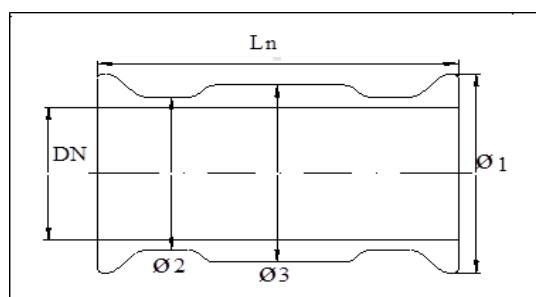

Inner lining grade and working temperature

(contact us to check the right grade to your specific working conditions)

AR/CN

-35 °C
+50 °C

corrosive or abrasive liquids

HH

-25 °C
+90 °C

Oil - fuel

YP

-25 °C
+50 °C

Highly corrosive liquids

Anvis Decize S.A.S.

12 rue Henri Darcy —ZAC du Four à Chaux —F-58300 DECIZE

✉ dilatoflex@anvisgroup.com — www.dilatoflex.com

ANVIS